


X-keys Programmable Keyboards 4, 8, and 16 key models

Part codes: K-XK-STD04, K-XK-STD08, K-XK-STD16

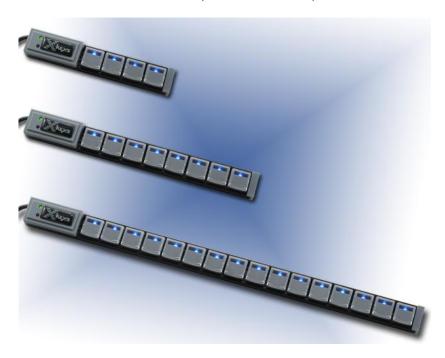

Description

Dedicated keys for shortcuts, hot keys, inserting text or Unicode symbols, typing email addresses, logins, and passwords. Anything you need to do on a computer can be turned into a macro and assigned to one clearly labelled key. Think of it as a speed dialler for your computer.

Clear lenses hold your key legends securely in place and protect them from wear while allowing you to quickly and easily update them as your requirements dictate. Key labelling options for developers or system integrators are available.

The K-XK-STD04/08/16 Stick uses MacroWorks 3 software to record key commands from the keyboard and send them to applications on any PC. ControllerMate software for Mac is also included free of charge. Any sequence or combination of keystrokes from a standard keyboard may be assigned to any key on the X-keys. Mouse commands (click & scroll) may also be programmed. Simple, intuitive steps allow even non-technical users to program the X-keys instantly. Programming files may easily be copied and shared. The X-keys Stick may also be operated in Hardware Mode, saving all programming in an onboard non-volatile memory and emulating the PC keyboard port (PS/2) version of the X-keys.

Features

- Up to 16 relegendable keys add control anywhere you need it
- Now available pre-cut to eight or four key sizes
- Suitable for mounting above a keyboard or under a monitor
- Create an interactive display control
- Add electronic control to a guitar
- Switch a KVM



- Addressable blue backlighting for each key
- Includes MacroWorks 3 software for Windows and ControllerMate for Mac OS X
- Hardware Mode features support keyboard, mouse, and joystick emulation
- Comprehensive Software Development Kit for programmers
- NEW Linux Software Development Kit
- USB HID class device

Specifications

Operating System	Windows XP, Vista, 7 (32 or 64 bit), Mac OS X, Others via USB keyboard
Included Software	Windows: MacroWorks 3, Mac: ControllerMate, Other: SDK
Switch Type	Low profile tactile feel, ¾" (19 mm) on centre
Number of Keys	16 single keys with second layer: 30 programmable keys
Кеу Сар Туре	5/8" (16 mm) sq. w/removable clear caps for easy labelling
Connector	USB "A"
Cord Length	54" (1.3 m)
Dims (16 key model)	14¼" x ½" x ½", (362 mm x 23 mm x 18 mm)
Weight (16 key model)	0.42 lbs. (0.19 kg)
Power Source	USB port, nominal voltage = 5 vdc
Power Consumption	Low power USB device – with backlighting off: less than 15 ma @ 5 vdc with backlighting
	on: less than 45 ma @ 5 vdc
Certifications	FCC class B, CE

In Hardware Mode

Hardware System	Any architecture supporting USB, including Sun, SGI, and HP workstations
Operating System	Programming requires MacroWorks 3 software for Windows XP, Vista, or 7. Operates on any
	OS supporting USB including Unix, Sun and Mac OS X
Memory Capacity	Each key is allocated 3 characters and a pool of 1000 additional keystrokes is available to
	any keys that require additional characters
Memory Type	EEPROM, non volatile memory (X-keys retains memory for over 200 years)
Number of Layers	2 layers – user selectable toggle and/or shift keys